

SUPERWINCH

SX

MIDNIGHT BLACK



INTRODUCING THE NEW SX MIDNIGHT BLACK WINCH


Hit the trail with confidence with the SX Midnight Black Series winch. Engineered to provide users the ideal combination of power, speed, innovation, and proven performance they demand from Superwinch. Innovative features such as a patented drum light, relocatable die-cast aluminum control box, 3/8" diameter synthetic rope, a 12' lighted wired remote, and wireless handheld remote. SX Series winches exceed the most demanding standards of today's modern vehicles, while delivering an affordable and stylish design which incorporates many class leading features not found in other high-performance winches. Available in 10,000 and 12,000 lbs. ratings with synthetic rope. When you run the Superwinch SX Midnight Series, you run the best!

FEATURES AND BENEFITS:

- **ERGONOMIC PULL-AND-TURN CLUTCH HANDLE**
Allows hassle-free operation free spool
- **PATENTED DRUM LIGHT**
Provides superior visibility in low light conditions
- **MULTI-FUNCTION WIRED REMOTE**
Includes integrated rechargeable flashlight
- **WIRELESS REMOTE**
Ergonomic handle with molle loop clip
- **RELOCATABLE DIE-CAST CONTROL BOX**
Heavy-duty aluminum construction with 18" leads
- **CLOCKABLE 3-STAGE PLANETARY GEARBOX**
Can be oriented in 4 different positions



DIMENSIONS

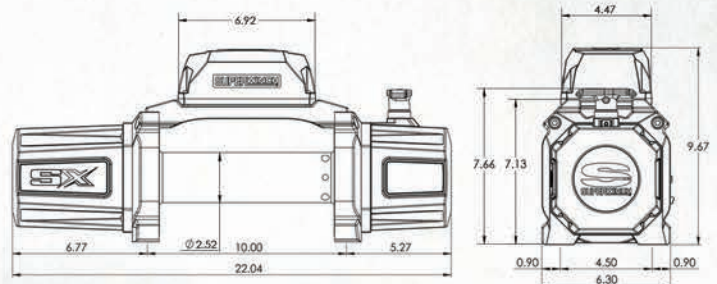

POWER, SPEED, INNOVATION AND PROVEN PERFORMANCE



SX 10SR AND SX 12SR

SPECIFICATIONS

WINCH MODEL: SX Midnight Black Series

PART NUMBERS: 1710204 (SX Midnight Black 10SR),
1712204 (SX Midnight Black 12SR)

RATED LINE PULL: 10,000 lbs. 12,000 lbs.

MOTOR: 5.5HP (10,000 lbs), 6.0HP (12,000 lbs)

CONTROL BOX: Relocatable die-cast aluminum construction

REMOTE CONTROL: 12' Handheld wired remote, optional wireless handheld remote (included with synthetic rope models). (Wired remote features flashlight with built-in lithium ION battery. Recharges while plugged into winch).

GEARBOX: 3-Stage planetary

GEAR RATIO: 218:1 (10,000 lbs.), 231:1 (12,000 lbs.)

CLUTCH: Ergonomic Pull-and-Turn Clutch Handle

BRAKE: 100% Full-load holding automatic mechanical brake

SYNTHETIC ROPE: 80' (24.4m) 3/8" Diameter lightweight synthetic with UV protection

DRUM DIAMETER: 2.5" (64mm)

FAIRLEAD: Aluminum hawse

TASK LIGHTING: Patented drum light, rechargeable flash light (wired remote only)

WINCH HOOK: Heavy duty pinned/latched

WARRANTY: Limited lifetime mechanical and 7 year limited electrical

FINISH: Black powder coating

IP RATING: IP68 waterproof and dustproof winch

MOUNTING BOLT PATTERN: 10" x 4.5"

SX 10/12 PERFORMANCE SPECIFICATIONS

LINE PULL	LINE SPEED		MOTOR	
	Lbs.	Ft./Min.	Amp Draw	
	10K	12K	10K	12K
0	27.3	23.4	85	68
2000	11.9	11.1	160	160
4000	9.7	8.5	211	204
6000	7.5	7.6	262	248
8000	6.3	6.2	312	291
10000	4.5	4.8	363	335
12000	–	3.7	–	379

PULL BY LAYER

10 K Layer/Lbs.	12K Layer/Lbs.
(1) – 10000	(1) – 12000
(2) – 7946	(2) – 9535
(3) – 6592	(3) – 7910
(4) – 5632	(4) – 6759

SHOWN WITH RELOCATED CONTROL BOX



WIRED REMOTE
WITH RECHARGEABLE
LIGHT