



APPLICATION: SPORTSMAN GG WINCH TRAY KITS / MAX WINCH TRAY / 2015 & UP CHEVY COLORADO & GMC CANYON APP PART #40-93845, 45-93840, 46-23845

ITEM	QUANTITY	DESCRIPTION	TOOLS NEEDED
1	1	WINCH TRAY ASSEMBLY	RATCHET
2	1	DRIVER SIDE LOWER MOUNTING BRACKET	UTILITY KNIFE
3	1	PASSENGER SIDE LOWER MOUNTING BRACKET	18MM SOCKET
4	1	DRIVER SIDE UPPER SUPPORT BRACKET	15MM SOCKET
5	1	PASSENGER SIDE UPPER SUPPORT BRACKET	14MM SOCKET
6	1	DRIVER SIDE REINFORCEMENT BRACKET	ALLEN WRENCH
7	1	PASSENGER SIDE REINFORCEMENT BRACKET	TORQUE WRENCH
8	6	M12 HEX HEAD SCREW 100MM LONG (YELLOW ZINC)	PRY TOOL
9	6	M12 HEX NUT (YELLOW ZINC)	SOCKET EXTENS.
10	10	M12 FLAT WASHER 24MM OD (YELLOW ZINC)	
11	6	M12 SPLIT LOCK WASHER (YELLOW ZINC)	
12	2	M12 BUTTON HEAD SCREW (STAINLESS)	
13	2	M12 CUPPED WASHER (STAINLESS)	
14	4	M12 HEX HEAD SCREW 35MM LONG (BLACK ZINC)	
15	4	M12 FLAT WASHER 24MM OD (BLACK ZINC)	
16	6	M12 FLANGE NUT (BLACK ZINC)	
17	6	M10 FLANGE NUT (BLACK ZINC)	
18	4	M10 HEX HEAD FLANGE BOLT (BLACK ZINC)	
19	2	M12 FLAT WASHER 44MM OD (YELLOW ZINC)	
20	1	GRILLE GUARD ASSEMBLY - GG WINCH TRAY KITS ONLY	
21	6	M10 BUTTON HEAD SCREW (STAINLESS) - GG WINCH TRAY KITS ONLY	
22	6	M10 CUPPED WASHER (STAINLESS) - GG WINCH TRAY KITS ONLY	
23	6	M10 FLANGE NUT (STAINLESS) - GG WINCH TRAY KITS ONLY	

ANTI-SEIZE LUBRICANT MUST BE USED ON ALL STAINLESS STEEL FASTENERS TO PREVENT THREAD DAMAGE

- 1. Remove contents from box, verify if all parts listed are present and undamaged. Carefully read and understand all instructions before attempting installation.
- 2. For vehicles without factory tow hooks trim plastic in the lower areas in Figure 1. Repeat for the passenger side.
- 3. For vehicles with factory tow hooks remove factory tow hooks and factory hardware they cannot be reused. Repeat for passenger side.
- 4. Loosely install the Lower Mounting Bracket and Reinforcement Bracket using the supplied M12 and M10 hardware as shown in Figure 2 and 3. Repeat for passenger side. (Note: For easier access remove plastic covers see Figure 9)
- Loosely install Winch Tray Assembly to previously installed brackets with supplied M12 hardware, see Figure 4. Note: (2) M12 bolts used per side, 3rd bolt hole is for tow hook option, see Figure 3.



Westin Automotive Products, Inc. 320 Covina Blvd

P.N.: 75-1052REV B

San Dimas, Ca. 91773


ECO #: W16-0999


Thank you for choosing Westin products for additional installation assistance please call Customer Service (800) 793-7846 www.westinautomotive.com


- 6. Trim plastic behind grille opening in Figure 1. Loosely install upper support brackets using supplied M10 hardware. When fastening upper support bracket to A-frame, set the bracket flush with the back of factory welded nut. (Note: Do not remove factory welded nut, see Figure 5)
- 7. Loosely install upper support bracket to previously installed winch tray with supplied M12 hardware, see Figure 6.
- 8. Align and adjust everything as necessary torque and tighten: M10 hardware to 30-35 ft-lbs., M12 hardware to 50-55 ft-lbs.
- 9. Install winch to winch tray per manufacturer instructions, see Figure 7.

FOR GRILLE GUARD INSTALLATION USE ONLY

- 10. Loosely install the Sportsman Grille Guard Assembly to previously installed winch tray with supplied M10 hardware, see Figure 8.
- 11. Align and adjust everything as necessary torque and tighten: M10 hardware to 30-35 ft-lbs.



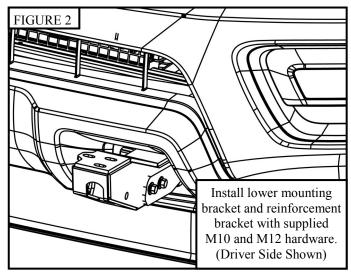


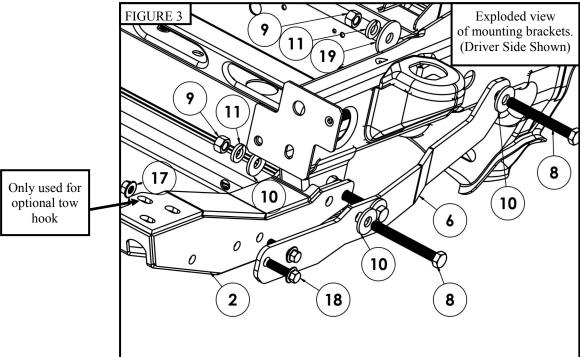






Westin Automotive Products, Inc. 320 Covina Blvd San Dimas, Ca. 91773


2

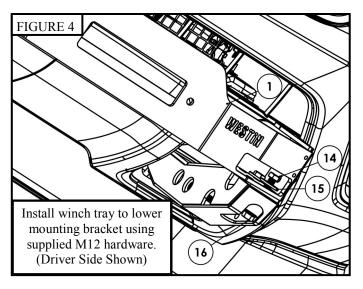





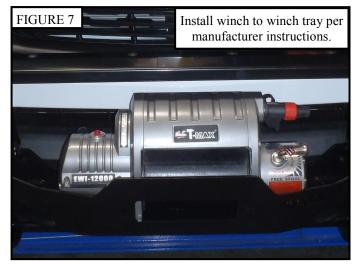

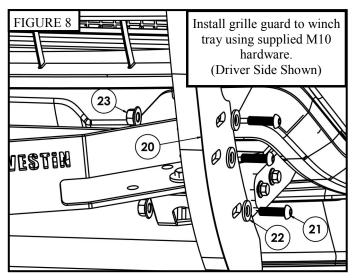





Westin Automotive Products, Inc. 320 Covina Blvd San Dimas, Ca. 91773



Installation Complete With Grille Guard

CARE INSTRUCTIONS

- REGULAR WAXING IS RECOMMENDED. DO NOT USE ANY TYPE OF POLISH OR WAX THAT MAY CONTAIN ABRASIVES.
- STAINLESS STEEL PRODUCTS CAN BE CLEANED WITH MILD SOAP AND WATER. STAINLESS STEEL POLISH SHOULD BE USED TO POLISH SMALL SCRATCHES.
- GLOSS BLACK FINISHES SHOULD BE CLEANED WITH MILD SOAP AND WATER.



Westin Automotive Products, Inc. 320 Covina Blvd San Dimas, Ca. 91773