




HAND HAULER 1000

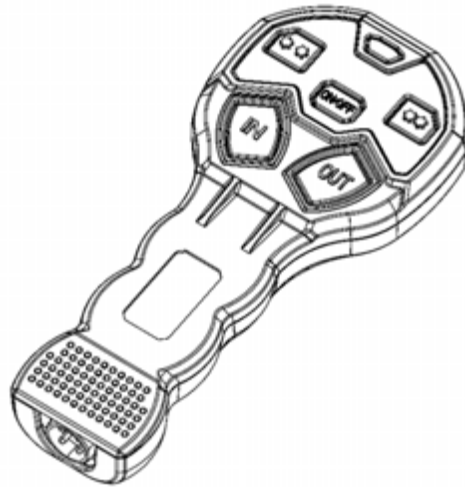

PART NUMBER:

1710041: Hand Hauler 1000 Remote



**SAVE THESE
INSTRUCTIONS**

CONTENTS


ITEM	QUANTITY	DESCRIPTION
1	1	REMOTE CONTROL (WIRED/WIRELESS)
2	1	REMOTE CONTROL CABLE

ITEM 1 	ITEM 2 
---	---

WIRELESS REMOTE CONTROL

1. Remove contents from box, verify if all parts listed are present and free from damage. **Failure to identify damage before use could lead to a rejection of any claim.**
2. Carefully read and understand all instructions before attempting to use the winch.

3. Turn the wireless remote control and winch off. See **Figure 1**.
4. Press and hold the ON/OFF button on the wireless remote control. Continue holding the button until **Step 5** is complete.
5. Turn on the portable winch. Continue holding the ON/OFF button until the winch LED screen displays two

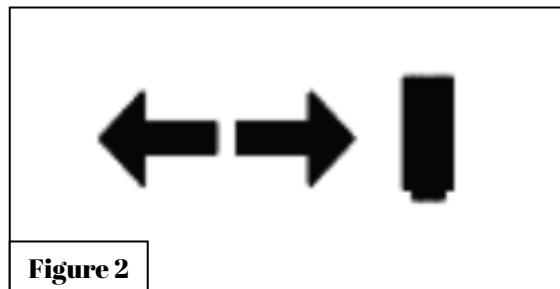

STANDARD OPERATION

6. **Utilizing the remote (wireless)** - Press and hold the ON/OFF button in the center of the remote until the LED above it flashes and turns solid (if the light does not turn solid check the internal battery). To spool in press and hold the IN button. The winch will spool in until the button has been released or the Rope Fully Retracted Switch has been tripped. To spool out press and hold the OUT button. See Figure 3. **Important - Release the OUT button immediately if the red portion of the winch rope becomes visible. See Figure 4.** The red portion of the winch rope signifies that very little rope remains wrapped on the winch drum. Spooling out past this point creates a hazardous condition.
7. **Utilizing the remote (corded)** - Attach one end of the supplied remote cable to the port on the remote. Secure

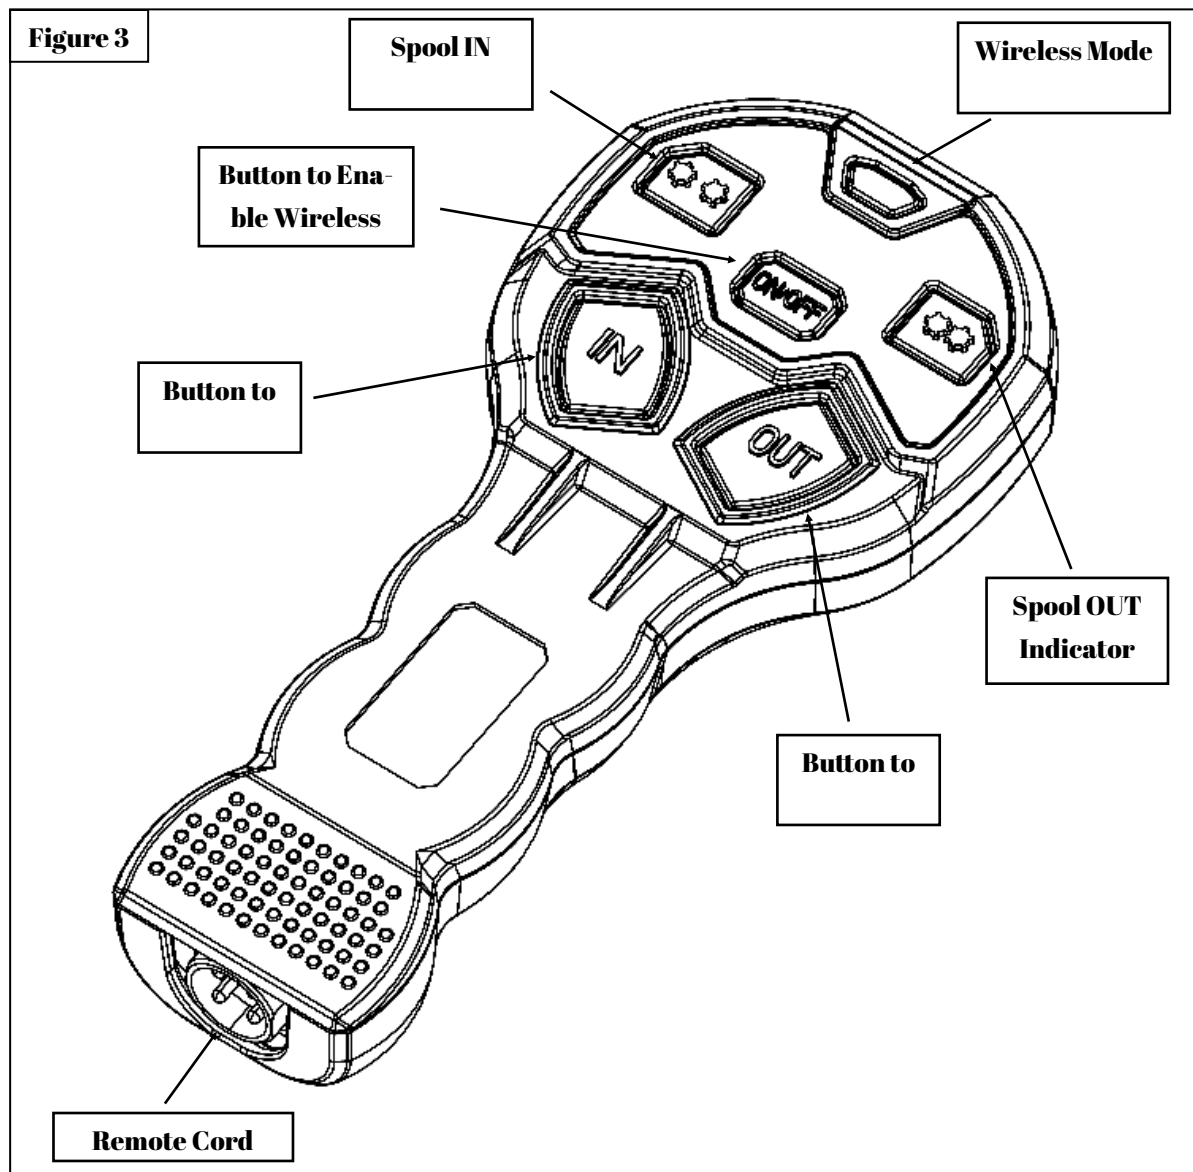


Figure 4


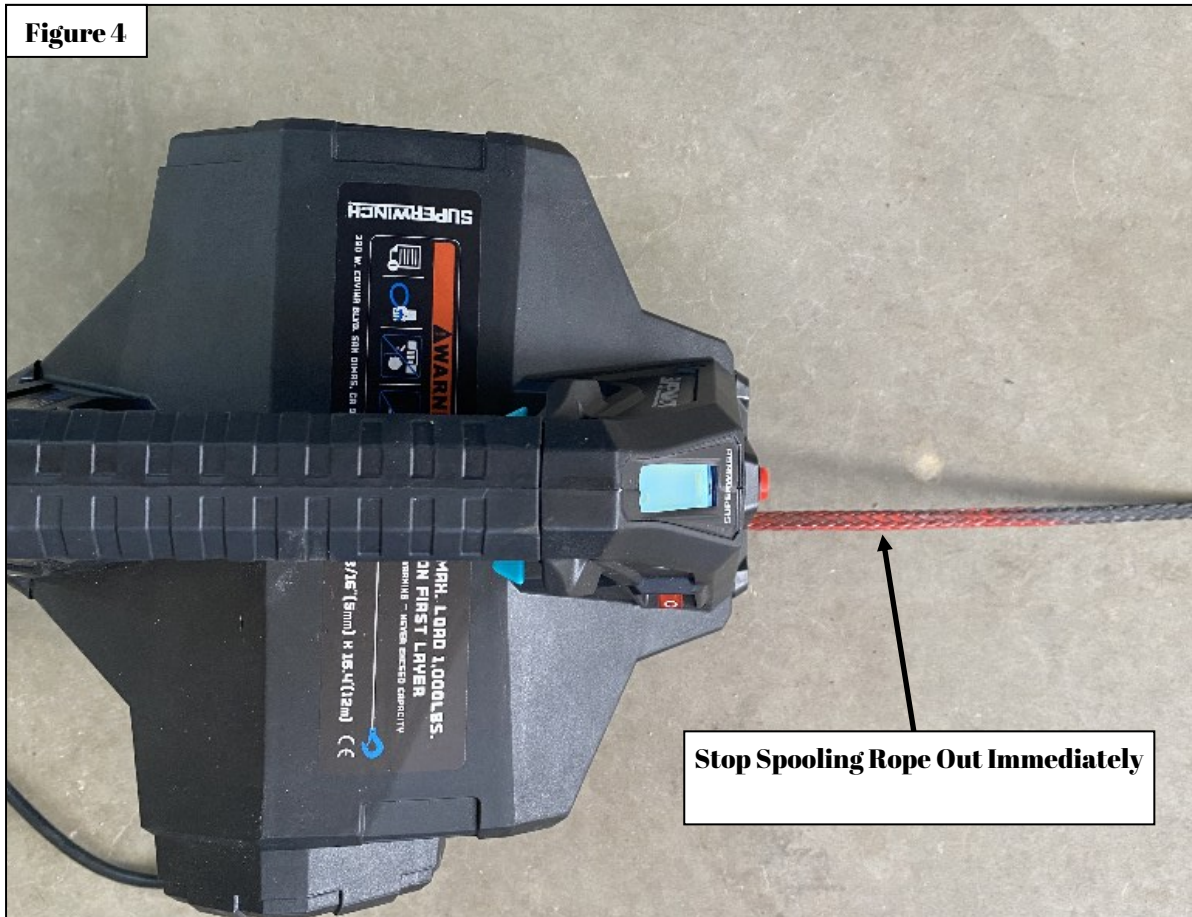


Figure 5 - Remote Connected To



REPLACE WIRELESS REMOTE BAT-

8. Remove the 4 screws on the back of the wireless remote. See **Figure 6**.
9. Remove the battery compartment cover. See **Figures 7 and 8**.
10. Remove the old battery. See **Figure 9**.
11. Install a new A23 battery.
12. Reinstall the battery compartment cover using the 4 screws removed in **Step 8**.

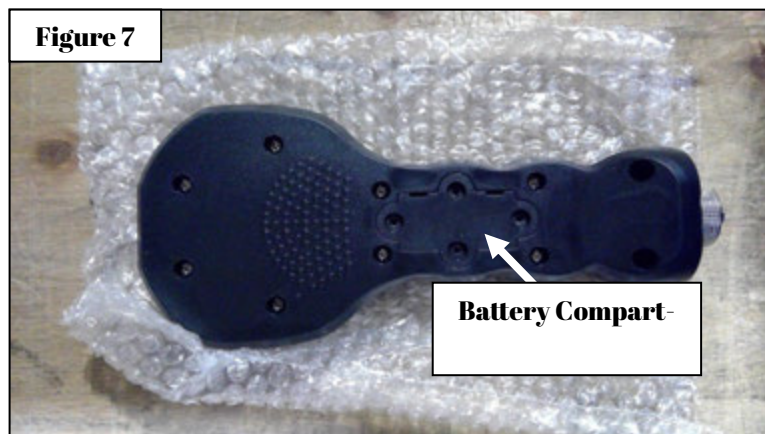

Failure to follow these instructions could lead to death, personal injury, and / or property damage.

FASTENERS:

All SUPERWINCH supplied fasteners must be utilized and installed in accordance with the installation instructions and apply torque to the specifications as defined. DOUBLE CHECK ALL FASTENERS BEFORE INITIAL USE, AND PERIODICALLY IN THE FUTURE TO ENSURE PROPER FUNCTION AND SAFETY.

EYE PROTECTION:

ALWAYS WEAR SAFETY GLASSES OR GOGGLES DURING THE INSTALLATION PROCESS TO AVOID PERSONAL INJURY.

FOR CALIFORNIA RESIDENTS ONLY-PROP 65 WARNING:



For more information on this and other products,
or to be put in contact with a Superwinch sales
rep or distributor, call +1 (800) 323- 2031
or email info@superwinch.com

SUPERWINCH
320 W. COVINA BLVD.
SAN DIMAS, CA 91773

© 2019 SUPERWINCH®, Superwinch®, and S Superwinch® (design) are registered trademarks of Superwinch Inc. in the United States and/or other countries.